

## Generator set data sheet



**Model:** C3000 D5e  
**Frequency:** 50 Hz  
**Fuel type:** Diesel  
**Emissions level:** 2g TAL

Spec sheet:	EMERS-5867-EN
Sound data sheet:	MSP-1188
Cooling data sheet (2g TAL):	MCP-2057
2g TAL emission compliance statement:	EPA-1260
PTS sheet:	PTS-323

Fuel consumption	Standby				Prime				Continuous			
	kVA (kW)				kVA (kW)				kVA (kW)			
Ratings	3000 (2400)				2750 (2200)				2100 (1680)			
Load	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
US gph	47.0	83.7	126.5	165.6	43.6	76.9	114.7	151.6	35.9	83.0	111.2	116.8
L/hr	178	317	479	627	165	291	434	574	136	314	421	442

Engine	Standby rating	Prime rating	Continuous rating
Engine manufacturer	Cummins		
Engine model	QSK78-G16		
Configuration	Cast iron, 60° V18 cylinder		
Aspiration	Turbocharged and low temperature after-cooled		
Gross engine power output, kWm	2539	2304	1759
BMEP at set rated load, kPa	2372	2117	1606
Bore, mm	170		
Stroke, mm	190		
Rated speed, rpm	1500		
Piston speed, m/s	9.5		
Compression ratio	15.5:1		
Lube oil capacity, L	413		
Overspeed limit, rpm	1850 ±50		
Regenerative power, kW	189		
Governor type	Electronic		
Starting voltage	24V Volts DC		

Fuel flow	
Maximum fuel flow, L/hr	2225
Maximum fuel inlet restriction, mm Hg	127
Maximum fuel inlet temperature, °C	71

<b>Air</b>	<b>Standby rating</b>	<b>Prime rating</b>	<b>Continuous rating</b>
Combustion air, m <sup>3</sup> /min	222	212	187
Maximum air cleaner restriction, kPa	6.22		

### Exhaust

Exhaust gas flow at set rated load, m <sup>3</sup> /min	542	516	406
Exhaust gas temperature, °C	481	468	453
Maximum exhaust back pressure, kPa	6.8		

### Optional remote vertical radiator

Ambient design, °C	NA	NA	40 or 45
Fan load, kW <sub>e</sub>	108		
Coolant capacity (with radiator), L	565		
Cooling system air flow, m <sup>3</sup> /sec @ 12.7 mm H <sub>2</sub> O	62.295		
Total heat rejection, Btu/min	NA	NA	67944
Maximum cooling air flow static restriction mm H <sub>2</sub> O	12.7		

### Weights\*

	<b>Open</b>
Unit dry weight kgs	18964
Unit wet weight kgs	19560


\* Weights represent a set with standard features. See outline drawing for weights of other configurations.

### Dimensions

	<b>Length (A)</b>	<b>Width (B)</b>	<b>Height (C)</b>
Standard open set dimensions	5691	2305	2708

### Genset outline

#### Open set

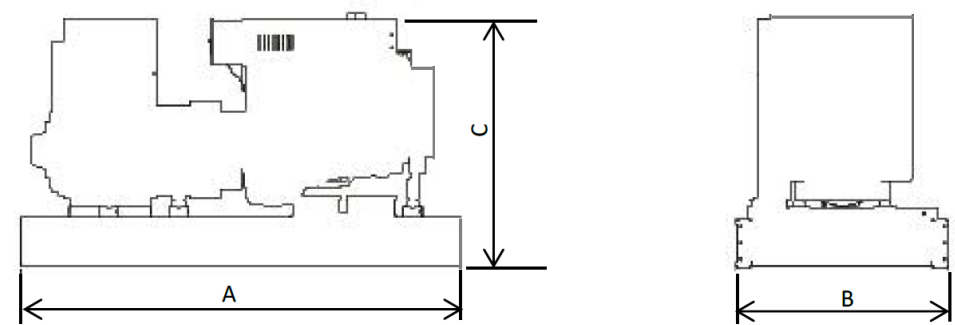

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

## Alternator data

Connection	Temp rise °C	Duty	Alternator	Voltage
Wye, 3-phase	80-150	S/P/C	LVS1804S,T,W,X	380-440
Wye, 3-phase	80-150	S/P/C	MVSI804R,S,T,W	3300
Wye, 3-phase	80-125	S/P/C	HVSI804S,T,W,X	

## Ratings definitions

Emergency Standby Power (ESP):	Limited-Time Running Power (LTP):	Prime Power (PRP):	Base Load (Continuous) Power (COP):
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) is in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

## Formulas for calculating full load currents:

### Three phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$$

### Single phase output

$$\frac{\text{kW} \times \text{SinglePhaseFactor} \times 1000}{\text{Voltage}}$$

For more information contact your local Cummins distributor or visit [power.cummins.com](http://power.cummins.com)

**Our energy working for you.™**

